

CURRENT TRANSFORMER

Model 10

Window Diameter 1.56"

Application:
Metering.

Frequency:
50 - 400 Hz




Insulation Level:
600 Volts, 10 kv BIL full wave

• Terminals are brass studs No. 8 - 32 with one flatwasher, lockwasher and regular nut.

• Approximate weight: 2.5 lbs.



E228202

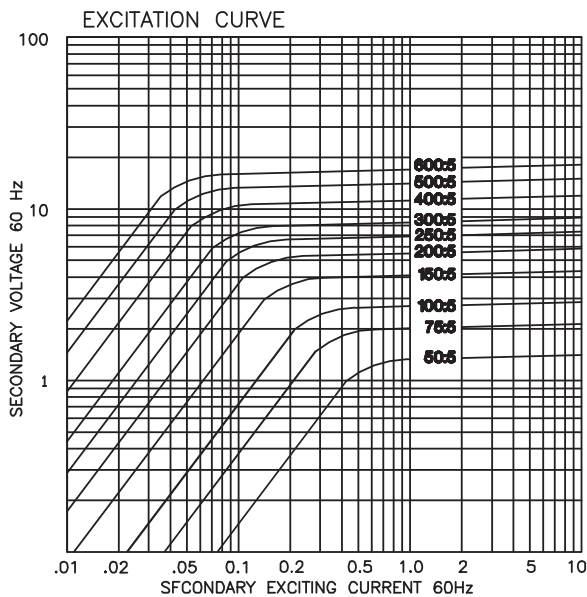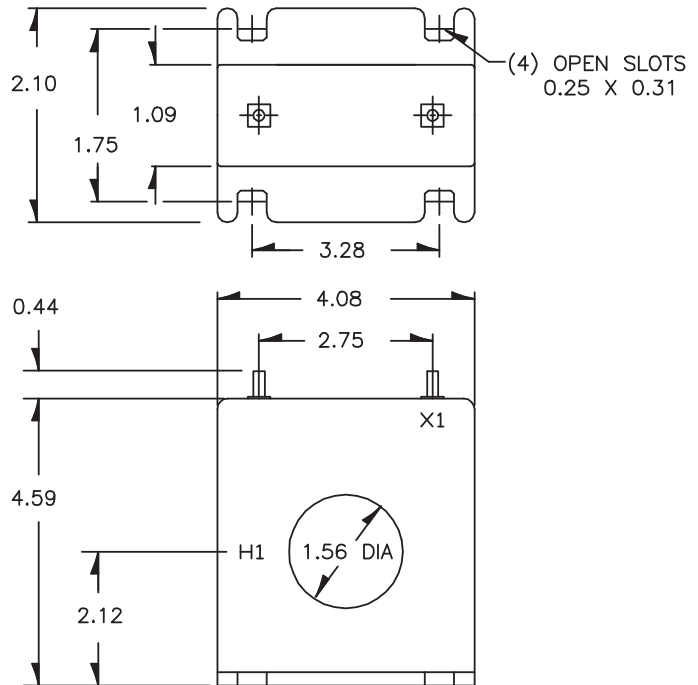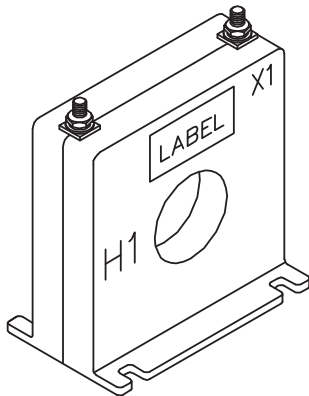

| CATALOG NUMBER | CURRENT RATIO | V.A. FOR ± 1% CLASS | ANSI METERING CLASS AT 60 Hz | | | | | SECONDARY WINDING RESISTANCE (OHMS @ 75° C) | CONTINUOUS THERMAL RATING FACTOR | |
|----------------|---------------|---------------------|------------------------------|------|------|------|------|---|----------------------------------|-------|
| | | | B0.1 | B0.2 | B0.5 | B0.9 | B1.8 | | @30°C | @55°C |
| 10SFT-500 | 50:5 | 2.0 ± 2% | 4.8 | - | - | - | - | 0.007 | 2.0 | 2.0 |
| 10SFT-750 | 75:5 | 2.5 | 1.2 | 4.8 | - | - | - | 0.010 | 2.0 | 2.0 |
| 10SFT-101 | 100:5 | 3.0 | 1.2 | 2.4 | 4.8 | - | - | 0.018 | 2.0 | 2.0 |
| 10SFT-151 | 150:5 | 5.0 | 0.6 | 0.6 | 2.4 | 4.8 | - | 0.031 | 2.0 | 2.0 |
| 10SFT-201 | 200:5 | 7.5 | 0.3 | 0.6 | 1.2 | 2.4 | 4.8 | 0.043 | 2.0 | 1.5 |
| 10SFT-251 | 250:5 | 10.0 | 0.3 | 0.3 | 1.2 | 1.2 | 2.4 | 0.053 | 2.0 | 1.5 |
| 10SFT-301 | 300:5 | 15.0 | 0.3 | 0.3 | 0.6 | 1.2 | 2.4 | 0.070 | 2.0 | 1.5 |
| 10SFT-401 | 400:5 | 20.0 | 0.3 | 0.3 | 0.3 | 0.6 | 1.2 | 0.114 | 1.5 | 1.0 |
| 10SFT-501 | 500:5 | 30.0 | 0.3 | 0.3 | 0.3 | 0.6 | 1.2 | 0.128 | 1.33 | 1.0 |
| 10SFT-601 | 600:5 | 40.0 | 0.3 | 0.3 | 0.3 | 0.6 | 0.6 | 0.192 | 1.33 | 0.8 |