

CURRENT TRANSFORMERS

Models 14, 15, 16

Window Diameters
0.50", 0.94", 1.25"

Note: Model 15 available now.
Models 14 & 16 available mid-September 2002.

Application:
With Ammeters, energy management systems and instrumentation.


Frequency:
50 - 400 Hz

Insulation Level:
600 Volts, 10 kv BIL full wave


- Terminals are brass studs No. 8 - 32 with one flat washer, lockwasher and regular nut.
- Flexible leads are UL 1015 105° C, CSA approved, #16 AWG, 24" long
- Non-standard length to be specified.
- SFT case style also available as SFL with leads
- Approximate weight: 0.9 lbs.



E228202



SFT Models

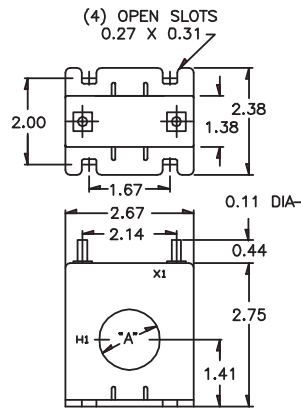

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA AT 60 Hz	DIM 'A'
14**- 500	50:5	± 1.5%	2.5	0.50
14**- 600	60:5	± 1.5%	2.5	
14**- 750	75:5	± 1.5%	2.5	
14**- 800	80:5	± 1.0%	2.5	
14**- 101	100:5	± 1.0%	3.0	
15**- 500	50:5	± 1.5%	2.0	0.94
15**- 600	60:5	± 1.5%	2.0	
15**- 750	75:5	± 1.5%	2.5	
15**- 800	80:5	± 1.0%	2.0	
15**- 101	100:5	± 1.0%	2.0	
15**- 121	120:5	± 1.0%	3.0	
15**- 1250	125:5	± 1.0%	4.0	
15**- 151	150:5	± 1.0%	5.0	
15**- 1750	175:5	± 1.0%	10	
15**- 201	200:5	± 1.0%	12.5	

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA AT 60 Hz	DIM 'A'
16**- 500	50:5	± 2 %	1.5	1.25
16**- 600	60:5	± 2 %	1.5	
16**- 750	75:5	± 2 %	3.0	
16**- 800	80:5	± 2 %	3.0	
16**- 101	100:5	± 1 %	3.0	
16**- 121	120:5	± 1 %	4.0	
16**- 1250	125:5	± 1 %	5.0	
16**- 151	150:5	± 1 %	6.0	
16**- 1750	175:5	± 1 %	7.0	
16**- 201	200:5	± 1 %	8.0	
16**- 251	250:5	± 1 %	10	
16**- 301	300:5	± 1 %	10	
16**- 401	400:5	± 1 %	15	

** NOTE: When ordering, prefix Cat No. with model designation required, i.e. 15SFT-151