



**Current Transformer
Technologies LTD**



Current Transformer

Model 112, 113, 114, 115, 117

rev 08132025

APPLICATION:

Metering

FREQUENCY:

50-400 Hz.

INSULATION LEVEL:

600 Volts. 10 kV BIL. full wave

WINDOW DIAMETER: 2.25",
2.75", 3.25", 4.00", 4.62"

APPROXIMATE WEIGHT:

25, 22, 22, 17, 11.5 lbs.

CONNECTIONS:

Terminals are brass studs No. 8-32 UNC with
one flat washer, lockwasher, and regular nut

Mounting kit # 112-KIT

Multi-ratios available upon request



Model	112	113	114	115	117
Window Size	2.25	2.75	3.25	4.00	4.62
Width	7.00	7.00	7.00	7.00	7.00
Height	7.12	7.12	7.12	7.12	7.12
Depth	4.00	4.00	4.00	4.00	4.00

CERTIFICATIONS:



E228202



223647




MODEL 112

Window Diameter 2.25"

Approximate weight: 25 lbs.

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60 HZ					SECONDARY WINDING RESISTANCE (OHMS @ 75°C)	CONTINUOUS THERMAL RATING FACTOR	
			B0.1	B0.2	B0.5	B0.9	B1.8		@ 30°C	@ 55°C
112-500	50:5	C10	1.2	2.4	-	-	-	0.029	2.0	2.0
112-750	75:5	C10	0.6	1.2	2.4	4.8	-	0.046	2.0	2.0
112-101	100:5	C20	0.6	0.6	2.4	2.4	4.8	0.062	2.0	2.0
112-151	150:5	C20	0.3	0.6	1.2	1.2	2.4	0.093	2.0	2.0
112-201	200:5	C50	0.3	0.3	0.3	0.6	1.2	0.124	2.0	2.0
112-251	250:5	C50	0.3	0.3	0.3	0.3	0.6	0.155	2.0	2.0
112-301	300:5	C50	0.3	0.3	0.3	0.3	0.6	0.186	2.0	2.0
112-401	400:5	C100	0.3	0.3	0.3	0.3	0.3	0.248	2.0	1.5
112-501	500:5	C100	0.3	0.3	0.3	0.3	0.3	0.341	2.0	1.5
112-601	600:5	C100	0.3	0.3	0.3	0.3	0.3	0.409	1.5	1.33
112-751	750:5	C200	0.3	0.3	0.3	0.3	0.3	0.495	1.5	1.0
112-801	800:5	C200	0.3	0.3	0.3	0.3	0.3	0.529	1.5	1.0
112-102	1000:5	C200	0.3	0.3	0.3	0.3	0.3	0.661	1.33	1.0
112-122	1200:5	C200	0.3	0.3	0.3	0.3	0.3	0.793	1.33	1.0

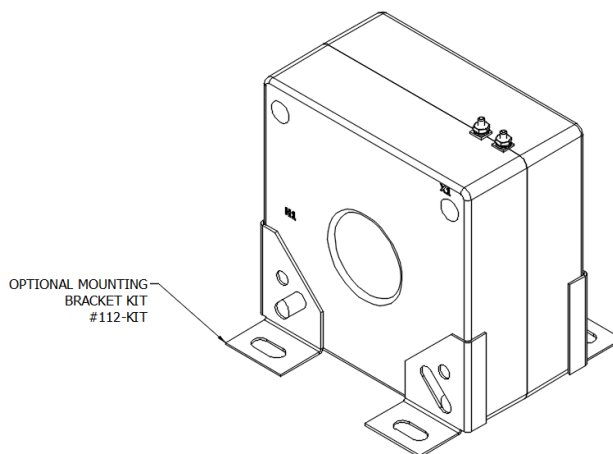

Products are manufactured in a plant whose quality management system has been certified to be in compliance with ISO 9001:2015 by NQA



Current Transformer
Technologies LTD





Current Transformer


Model 112, 113, 114, 115, 117

rev 08132025

Models 112, 113, 144, 115 & 117

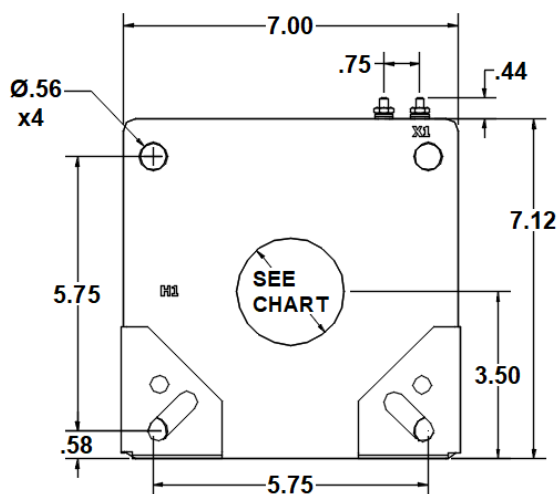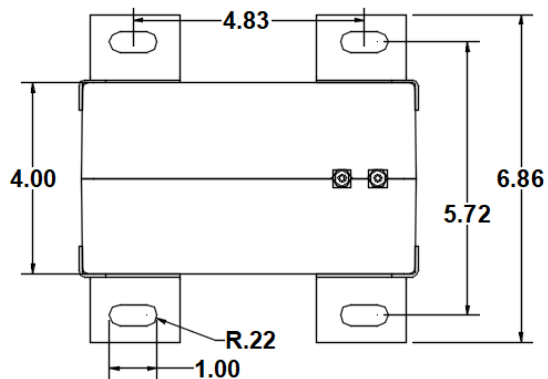

EXCITATION CURVE

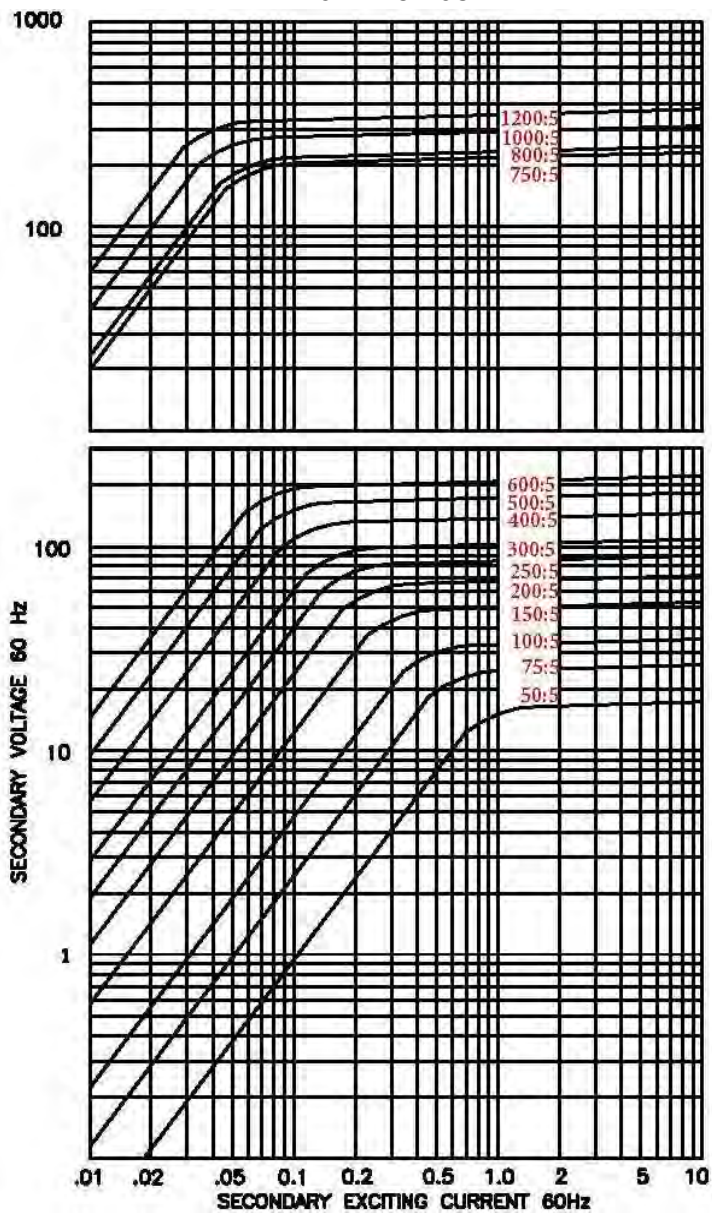

Model 112



Current Transformer
Technologies LTD



Current Transformer

Model 112, 113, 114, 115, 117

rev 08132025


MODEL 113

Window Diameter 2.75"

Approximate weight: 23 lbs.

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 50 Hz					SECONDARY WINDING RESISTANCE (OHMS @ 75° C)	CONTINUOUS THERMAL RATING FACTOR	
			BO.1	BO.2	BO.5	BO.9	B1.8		@ 30° C	@ 55° C
113 - 500	50:5	C10	2.4	4.8	-	-	-	0.033	2	2
113 - 750	75:5	C10	0.6	1.2	4.8	4.8	-	0.043	2	2
113 - 101	100:5	C20	0.6	0.6	2.4	2.4	4.8	0.059	2	2
113 - 151	150:5	C20	0.3	0.3	0.6	1.2	2.4	0.089	2	2
113 - 201	200:5	C20	0.3	0.3	0.6	0.6	1.2	0.118	2	2
113 - 251	250:5	C50	0.3	0.3	0.6	0.6	1.2	0.163	2	2
113 - 301	300:5	C50	0.3	0.3	0.3	0.6	1.2	0.195	2	2
113 - 401	400:5	C100	0.3	0.3	0.3	0.3	0.6	0.260	2	1.5
113 - 501	500:5	C100	0.3	0.3	0.3	0.3	0.3	0.325	2	1.5
113 - 601	600:5	C100	0.3	0.3	0.3	0.3	0.3	0.390	1.5	1.33
113 - 751	750:5	C200	0.3	0.3	0.3	0.3	0.3	0.488	1.5	1.0
113 - 801	800:5	C200	0.3	0.3	0.3	0.3	0.3	0.503	1.5	1.0
113 - 102	1000:5	C200	0.3	0.3	0.3	0.3	0.3	0.629	1.33	1.0
113 - 122	1200:5	C200	0.3	0.3	0.3	0.3	0.3	0.755	1.33	1.0
113 - 152	1500:5	C200	0.3	0.3	0.3	0.3	0.3	0.943	1.0	0.8

EXCITATION CURVE

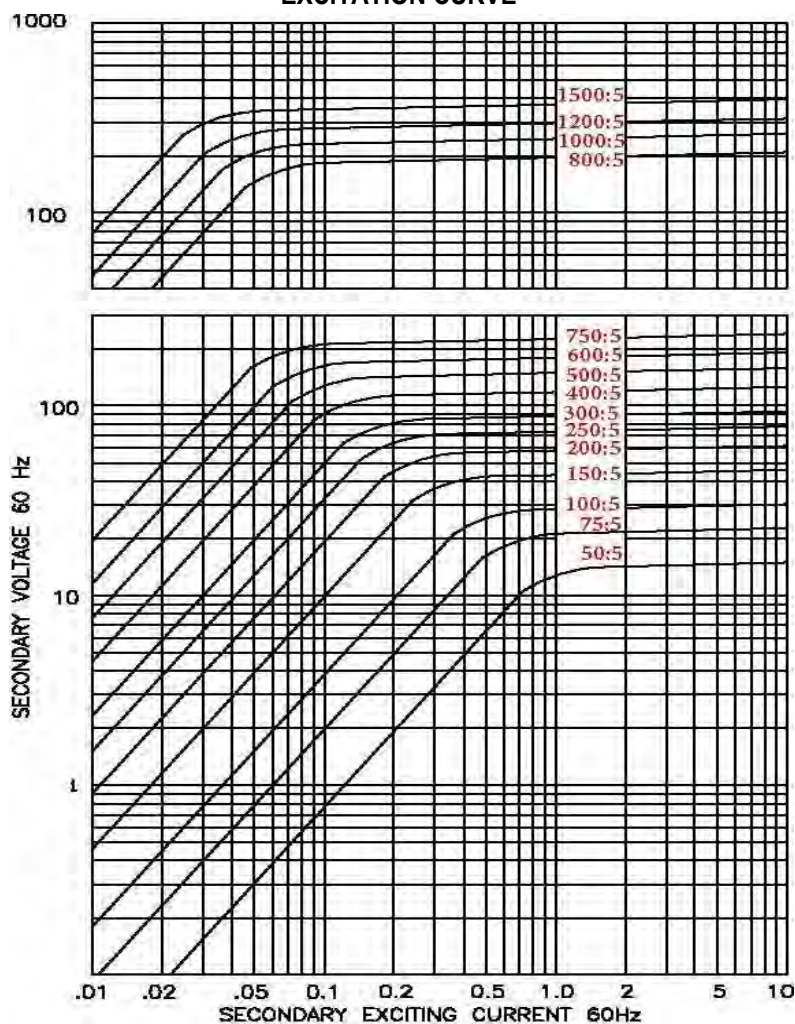

Model 113




MODEL 114

Window Diameter 3.25"

Approximate weight: 22 lbs.

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60 Hz					SECONDARY WINDING RESISTANCE (OHMS @ 75° C)	CONTINUOUS THERMAL RATING FACTOR	
			BO.1	BO.2	BO.5	BO.9	B1.8		@ 30° C	@ 55° C
114 – 500	50:5	-	1.2	4.8	-	-	-	0.024	2.0	2.0
114 – 750	75:5	C10	1.2	2.4	4.8	-	-	0.040	2.0	2.0
114 – 101	100:5	C10	1.2	1.2	2.4	4.8	-	0.055	2.0	2.0
114 – 151	150:5	C20	0.6	0.6	1.2	2.4	4.8	0.082	2.0	2.0
114 – 201	200:5	C20	0.3	0.3	0.6	1.2	2.4	0.112	2.0	2.0
114 – 251	250:5	C50	0.3	0.3	0.6	1.2	1.2	0.141	2.0	2.0
114 – 301	300:5	C50	0.3	0.3	0.6	0.6	1.2	0.165	2.0	2.0
114 – 401	400:5	C100	0.3	0.3	0.3	0.3	0.6	0.220	2.0	1.5
114 – 501	500:5	C100	0.3	0.3	0.3	0.3	0.6	0.267	2.0	1.5
114 – 601	600:5	C100	0.3	0.3	0.3	0.3	0.3	0.371	1.5	1.33
114 – 751	750:5	C100	0.3	0.3	0.3	0.3	0.3	0.464	1.5	1.0
114 – 801	800:5	C200	0.3	0.3	0.3	0.3	0.3	0.495	1.5	1.0
114 – 102	1000:5	C100	0.3	0.3	0.3	0.3	0.3	0.597	1.5	1.0
114 – 122	1200:5	C200	0.3	0.3	0.3	0.3	0.3	0.716	1.33	1.0
114 – 152	1500:5	C200	0.3	0.3	0.3	0.3	0.3	0.896	1.0	0.8
114 – 162	1600:5	C200	0.3	0.3	0.3	0.3	0.3	0.955	1.0	0.8

EXCITATION CURVE

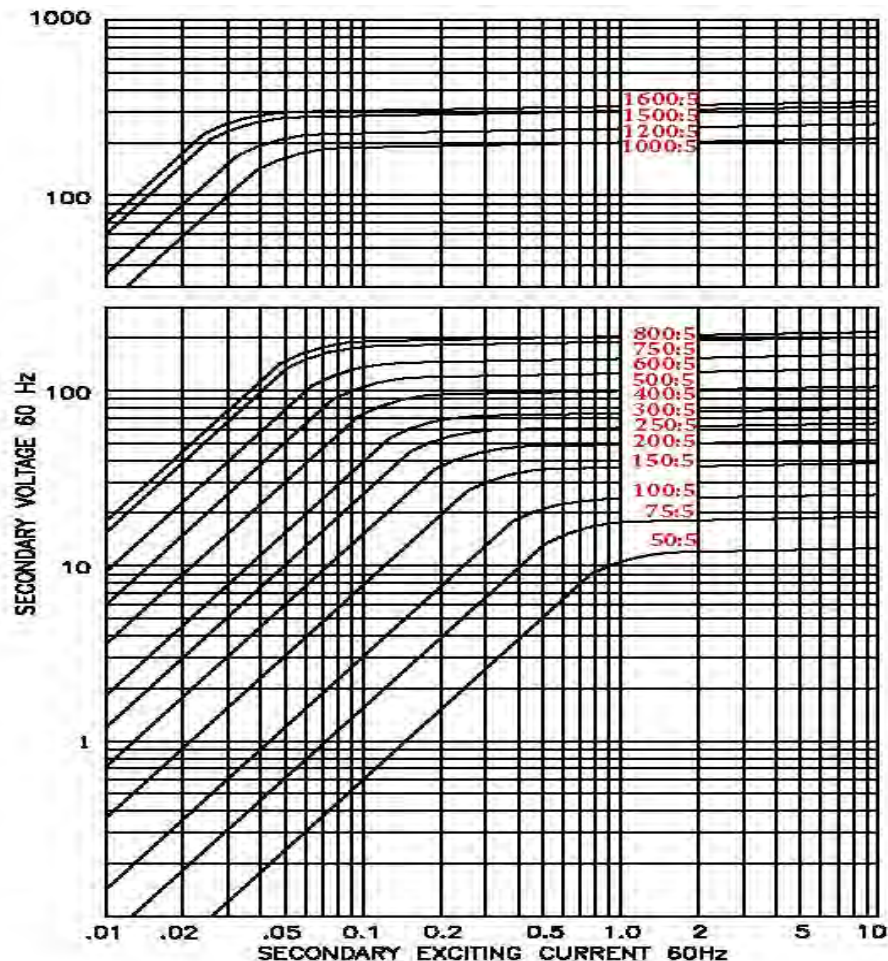


Model 114



MODEL 115
Window Diameter 4.0"
Approximate weight: 19 lbs.

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60 Hz					SECONDARY WINDING RESISTANCE (OHMS @ 75° C)	CONTINUOUS THERMAL RATING FACTOR	
			BO.1	BO.2	BO.5	BO.9	B1.8		@ 30° C	@ 55° C
115 – 500	50:5	-	2.4	4.8	-	-	-	0.025	2.0	2.0
115 – 750	75:5	-	1.2	2.4	4.8	-	-	0.037	2.0	2.0
115 – 101	100:5	C10	1.2	1.2	2.4	4.8	-	0.046	2.0	2.0
115 – 151	150:5	C10	0.6	0.6	1.2	2.4	4.8	0.074	2.0	2.0
115 – 201	200:5	C20	0.3	0.3	0.6	1.2	2.4	0.099	2.0	2.0
115 – 251	250:5	C20	0.3	0.3	0.6	1.2	2.4	0.127	2.0	2.0
115 – 301	300:5	C20	0.3	0.3	0.3	0.6	1.2	0.148	2.0	2.0
115 – 401	400:5	C50	0.3	0.3	0.3	0.3	0.6	0.208	2.0	2.0
115 – 501	500:5	C50	0.3	0.3	0.3	0.3	0.3	0.247	2.0	1.5
115 – 601	600:5	C50	0.3	0.3	0.3	0.3	0.3	0.305	2.0	1.5
115 – 751	750:5	C100	0.3	0.3	0.3	0.3	0.3	0.428	1.5	1.33
115 – 801	800:5	C100	0.3	0.3	0.3	0.3	0.3	0.457	1.5	1.0
115 – 102	1000:5	C100	0.3	0.3	0.3	0.3	0.3	0.571	1.5	1.0
115 – 122	1200:5	C100	0.3	0.3	0.3	0.3	0.3	0.660	1.33	1.0
115 – 152	1500:5	C100	0.3	0.3	0.3	0.3	0.3	0.825	1.0	0.8
115 – 162	1600:5	C100	0.3	0.3	0.3	0.3	0.3	0.880	1.0	0.8
115 – 202	2000:5	C200	0.3	0.3	0.3	0.3	0.3	1.100	1.0	0.8
115 – 252	2500:5	C100	0.3	0.3	0.3	0.3	0.3	1.292	1.0	0.8
115 – 302	3000:5	C200	0.3	0.3	0.3	0.3	0.3	1.550	0.8	0.6
115 – 322	3200:5	C200	0.3	0.3	0.3	0.3	0.3	1.653	0.8	0.6

EXCITATION CURVE

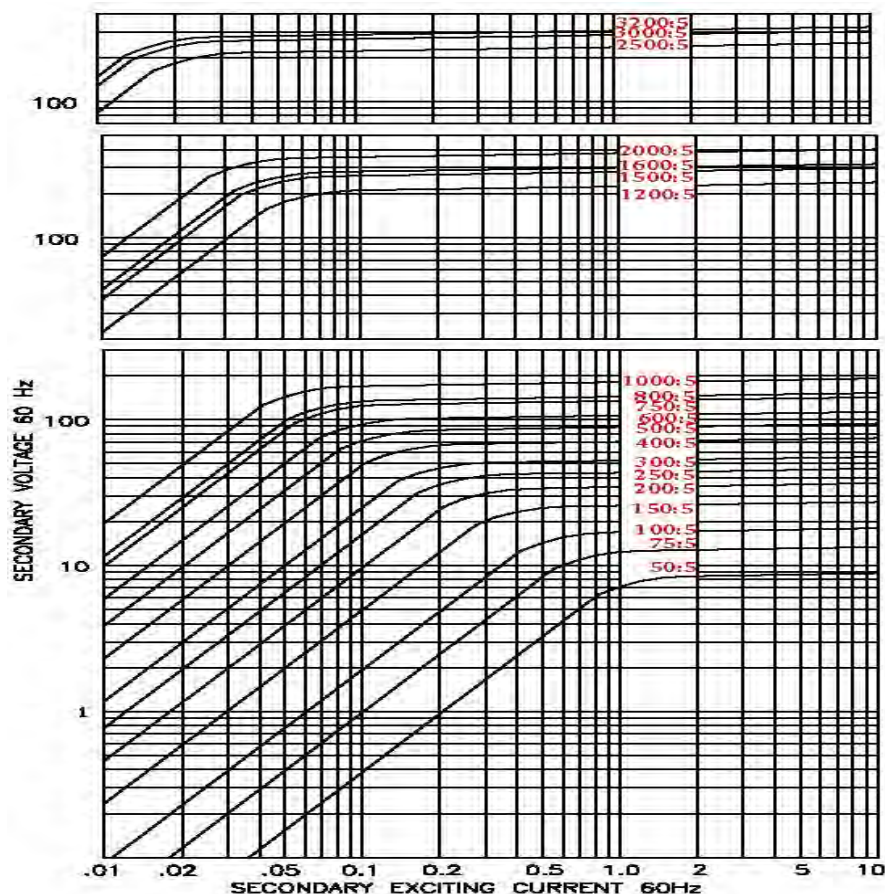

MODEL 115




MODEL 117

Window Diameter 4.62"

Approximate weight: 13 lbs.

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60 Hz					SECONDARY WINDING RESISTANCE (OHMS @ 75° C)	CONTINUOUS THERMAL RATING FACTOR	
			BO.1	BO.2	BO.5	BO.9	B1.8		@ 30° C	@ 55° C
117 - 500	50:5	-	2.4	-	-	-	-	0.015	2.0	2.0
117 - 750	75:5	-	2.4	2.4	-	-	-	0.024	2.0	2.0
117 - 101	100:5	-	1.2	2.4	4.8	-	-	0.043	2.0	2.0
117 - 151	150:5	C10	0.6	0.6	2.4	4.8	4.8	0.069	2.0	2.0
117 - 201	200:5	C10	0.6	0.6	1.2	2.4	4.8	0.085	2.0	2.0
117 - 251	250:5	C20	0.6	0.6	0.6	1.2	2.4	0.106	2.0	2.0
117 - 301	300:5	C20	0.3	0.3	0.6	1.2	2.4	0.145	2.0	2.0
117 - 401	400:5	C20	0.3	0.3	0.3	0.6	1.2	0.184	2.0	2.0
117 - 501	500:5	C20	0.3	0.3	0.3	0.3	0.6	0.236	2.0	1.5
117 - 601	600:5	C20	0.3	0.3	0.3	0.3	0.6	0.283	2.0	1.5
117 - 751	750:5	C50	0.3	0.3	0.3	0.3	0.3	0.354	1.5	1.33
117 - 801	800:5	C50	0.3	0.3	0.3	0.3	0.3	0.425	1.5	1.33
117 - 102	1000:5	C50	0.3	0.3	0.3	0.3	0.3	0.531	1.5	1.0
117 - 122	1200:5	C100	0.3	0.3	0.3	0.3	0.3	0.637	1.33	1.0
117 - 152	1500:5	C50	0.3	0.3	0.3	0.3	0.3	0.768	1.33	1.0
117 - 162	1600:5	C50	0.3	0.3	0.3	0.3	0.3	0.819	1.0	0.8
117 - 202	2000:5	C50	0.3	0.3	0.3	0.3	0.3	1.024	1.0	0.6
117 - 252	2500:5	C100	0.3	0.3	0.3	0.3	0.3	1.279	1.0	0.6
117 - 302	3000:5	-	0.3	0.3	0.3	0.3	0.3	1.428	1.0	0.6
117 - 322	3200:5	-	0.3	0.3	0.3	0.3	0.3	1.523	1.0	0.6
117 - 402	4000:5	-	0.3	0.3	0.3	0.3	0.3	2.385	0.8	0.6

EXCITATION CURVE

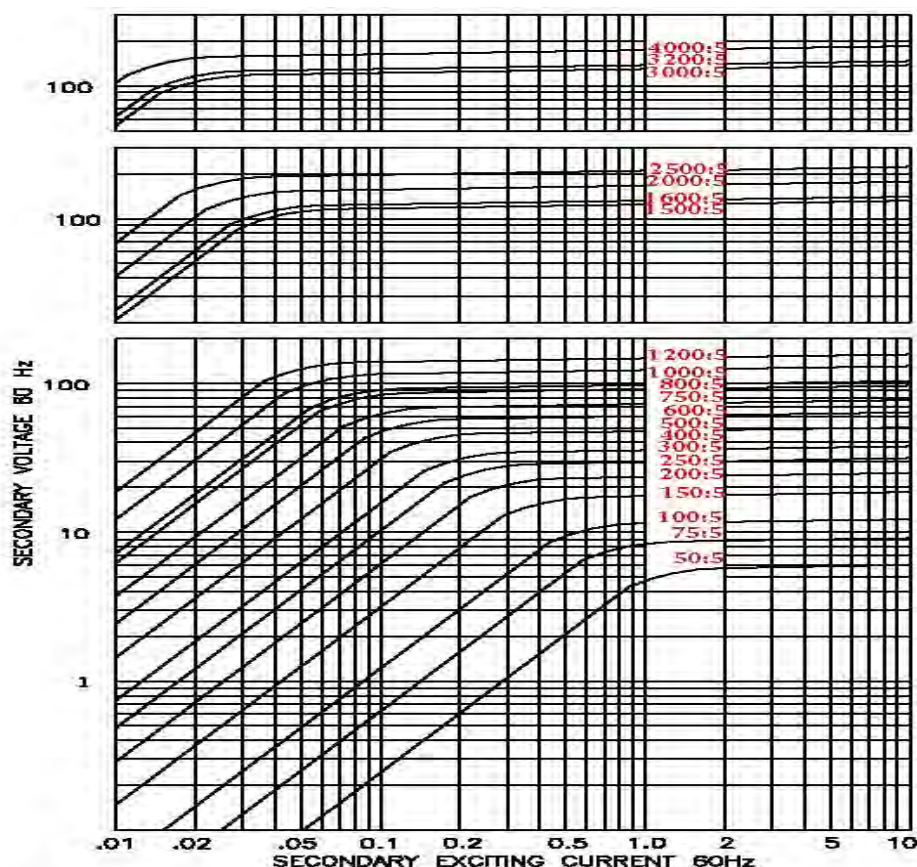

Model 117