



**Current Transformer
Technologies LTD**



Current Transformer

Model 15

rev 08072025

APPLICATION:

With ammeters, energy management systems and instrumentation

FREQUENCY:

50-400 Hz.

INSULATION LEVEL:

600 Volts. 10 kV BIL. full wave

WINDOW DIAMETER:

0.94"

APPROXIMATE WEIGHT:

0.9 lbs.

CONNECTIONS:

- Non-standard lead length can be specified
- Flexible leads are UL 1015 105° C CSA approved, #16 AWG, 24" long
- Terminals are brass studs No. 8-32 UNC with one flat washer, lockwasher, and regular nut



CERTIFICATIONS:



E228202



223647



ISO 9001

QUALITY
MANAGEMENT




Model	15SFT
Window Size	0.94
Width	2.67
Height	2.75
Depth	1.38

MODEL 15

Window Diameter 0.94"

Approximate weight: 0.9 lbs.

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 HZ	BURDEN VA AT 60 HZ
15SFT-500	50:5	$\pm 1.5\%$	2
15SFT-600	60:5	$\pm 1.5\%$	2
15SFT-750	75:5	$\pm 1.5\%$	2.5
15SFT-800	80:5	$\pm 1.0\%$	2
15SFT-101	100:5	$\pm 1.0\%$	2
15SFT-121	120:5	$\pm 1.0\%$	3
15SFT-1250	125:5	$\pm 1.0\%$	4
15SFT-151	150:5	$\pm 1.0\%$	5
15SFT-1750	175:5	$\pm 1.0\%$	10
15SFT-201	200:5	$\pm 1.0\%$	12.5

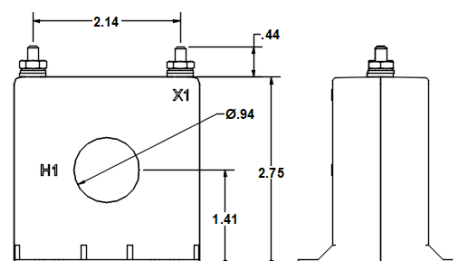

Products are manufactured in a plant whose quality management system has been certified to be in compliance with ISO 9001:2015 by NQA