



Current Transformer
Technologies LTD



Current Transformer

Model 5DRL

rev 08072025

APPLICATION:

With ammeters, wattmeters and cross
current compensation

FREQUENCY:

50-400 Hz.

INSULATION LEVEL:

600 Volts. 10 kV BIL. full wave

WINDOW DIAMETER:

1.56"

APPROXIMATE WEIGHT:

2.0 lbs.

CONNECTIONS:

-Flexible Leads are UL 1015 105°C,

CSA approved #16AWG, 24" long

-Non-standard length to be specified



5DRL

Model	5DRL
Window Size	1.56
Width	3.63
Height	3.63
Depth	2.06



E228202



223647



ISO 9001




QUALITY
MANAGEMENT

MODEL 5DRL

Window Diameter 1.56"

Approximate weight: 2.0 lbs.

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA AT 60 Hz
5DRL-500	50:5	$\pm 2\%$	2.5
5DRL-600	60:5	$\pm 1\%$	2.5
5DRL-750	75:5	$\pm 1\%$	3.5
5DRL-101	100:5	$\pm 1\%$	5
5DRL-151	150:5	$\pm 1\%$	10
5DRL-201	200:5	$\pm 1\%$	12.5
5DRL-251	250:5	$\pm 1\%$	20
5DRL-301	300:5	$\pm 1\%$	20
5DRL-401	400:5	$\pm 1\%$	40
5DRL-501	500:5	$\pm 1\%$	50
5DRL-601	600:5	$\pm 1\%$	60
5DRL-751	750:5	$\pm 1\%$	60
5DRL-801	800:5	$\pm 1\%$	60
5DRL-102	1000:5	$\pm 1\%$	75
5DRL-122	1200:5	$\pm 1\%$	90

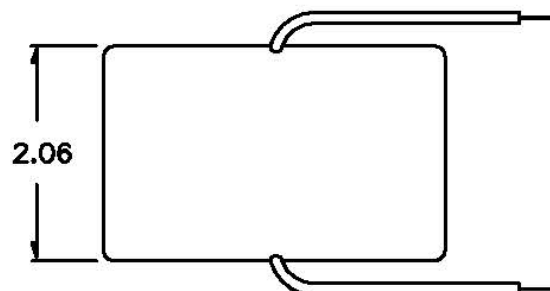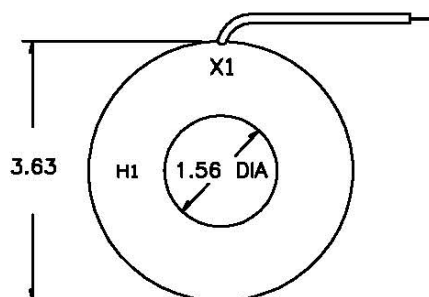

Products are manufactured in a plant whose quality management system has been certified to be in compliance with ISO 9001:2015 by NQA