




**Current Transformer
Technologies LTD**



Current Transformer

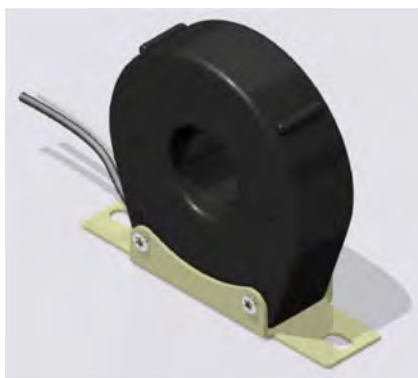

APPLICATION:

With ammeters, wattmeters and cross current compensation

FREQUENCY:

50-400 Hz.

INSULATION LEVEL:

600 Volts. 10 kV BIL. full wave

WINDOW DIAMETER:

1.25"

APPROXIMATE WEIGHT:

1.3 lbs.

CONNECTIONS:

-Flexible Leads are UL 1015 105°C,
16AWG, 24" long

-Non-standard length to be specified

Model	58RBL
Window Size	1.25
Width	4.50
Height	3.70
Depth	1.25

Model 58RBL

rev 08072025

CERTIFICATIONS:



E228202



223647



ISO 9001



QUALITY
MANAGEMENT

MODEL 58RBL

Window Diameter 1.25"

Approximate weight: 1.3 lbs.

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 HZ	BURDEN VA AT 60 HZ
58RBL-500	50:5	$\pm 3\%$	1.5
58RBL-600	60:5	$\pm 2\%$	2.5
58RBL-750	75:5	$\pm 1.5\%$	2.5
58RBL-800	80:5	$\pm 1\%$	2.5
58RBL-101	100:5	$\pm 1.5\%$	5
58RBL-121	120:5	$\pm 1\%$	5
58RBL-1250	125:5	$\pm 1\%$	6
58RBL-151	150:5	$\pm 1\%$	7.5
58RBL-201	200:5	$\pm 1\%$	12.5
58RBL-251	250:5	$\pm 1\%$	12.5
58RBL-301	300:5	$\pm 1\%$	15
58RBL-401	400:5	$\pm 1\%$	25
58RBL-501	500:5	$\pm 1\%$	25
58RBL-601	600:5	$\pm 1\%$	25
58RBL-751	750:5	$\pm 1\%$	25
58RBL-801	800:5	$\pm 1\%$	25

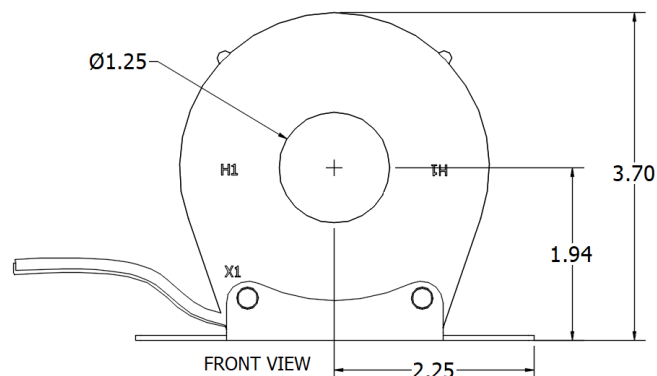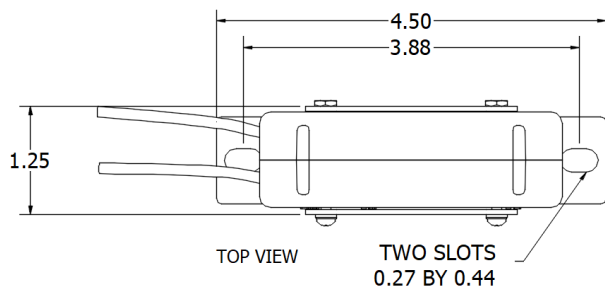

Products are manufactured in a plant whose quality management system has been certified to be in compliance with ISO 9001:2015 by NQA