



**Current Transformer
Technologies LTD**



Current Transformer

Model 6A

rev 08132025

CERTIFICATIONS:

APPLICATION:

Ammeters, wattmeters.

FREQUENCY:

50-400 Hz.

INSULATION LEVEL:

600 Volts. 10 kV BIL full wave

WINDOW DIAMETER:

2.06"

APPROXIMATE WEIGHT:

1.25 lbs.

CONNECTIONS:

- Terminal and brass studs No. 8-32 with one flat washer, lock washer, and regular nut
- Flexible leads are UL 1015 105°C, CSA approved, #16 AWG, 24" long.
- Non-standard, lead length can be specified.
- Mounting bracket # 6SHT-KIT
- Model 6ASHT and model 6ASFT also available as 6ASHL and 6ASFL with leads



Model	6ASHT	6ASFT	6ARL
Window Size	2.06	2.06	2.06
Width	4.08	4.12	4.08
Height	4.22	4.22	4.08
Depth	1.10	1.10	1.10



MODEL 6A

Window Diameter 2.06"
Approximate weight: 1.25 lbs.

CATALOG NUMBER	CURRENT RATIO	V.A. $\pm$ 1% CLASS	ANSI METERING CLASS AT 60 HZ					SECONDARY WINDING RESISTANCE (OHMS @ 75°C)	CONTINUOUS THERMAL RATING FACTOR	
			B0.1	B0.2	B0.5	B0.9	B1.8		@ 30°C	@ 55°C
6A**--101	100:5	1.0	1.2	2.4	-	-	-	0.015	2.0	2.0
6A**--151	150:5	5.0	1.2	1.2	4.8	4.8	-	0.024	2.0	2.0
6A**--201	200:5	5.0	0.6	1.2	2.4	4.8	-	0.037	2.0	2.0
6A**--251	250:5	7.5	0.3	0.6	2.4	2.4	4.8	0.044	2.0	1.5
6A**--301	300:5	12.5	0.3	0.6	1.2	2.4	2.4	0.055	2.0	1.5
6A**--401	400:5	15.0	0.3	0.3	0.6	1.2	2.4	0.071	1.5	1.33
6A**--501	500:5	25.0	0.3	0.3	0.6	1.2	2.4	0.107	1.5	1.0
6A**--601	600:5	30.0	0.3	0.3	0.6	0.6	1.2	0.128	1.33	1.0
6A**--751	750:5	30.0	0.3	0.3	0.6	0.6	1.2	0.156	1.25	1.0
6A**--801	800:5	35.0	0.3	0.3	0.6	0.6	0.6	0.167	1.25	0.8
6A**--102	1000:5	35.0	0.3	0.3	0.3	0.6	0.6	0.208	1.0	0.8
6A**--122	1200:5	40.0	0.3	0.3	0.3	0.3	0.6	0.250	1.0	0.8
6A**--152	1500:5	50.0	0.3	0.3	0.3	0.3	0.6	0.388	1.0	0.8

*Note: When ordering, prefix Cat No. with model designation, i.e. 6SHT-201, 6RL-301 etc.




Current Transformer
Technologies LTD




Current Transformer

Model 6A
rev 08132025

Model 6ASHT

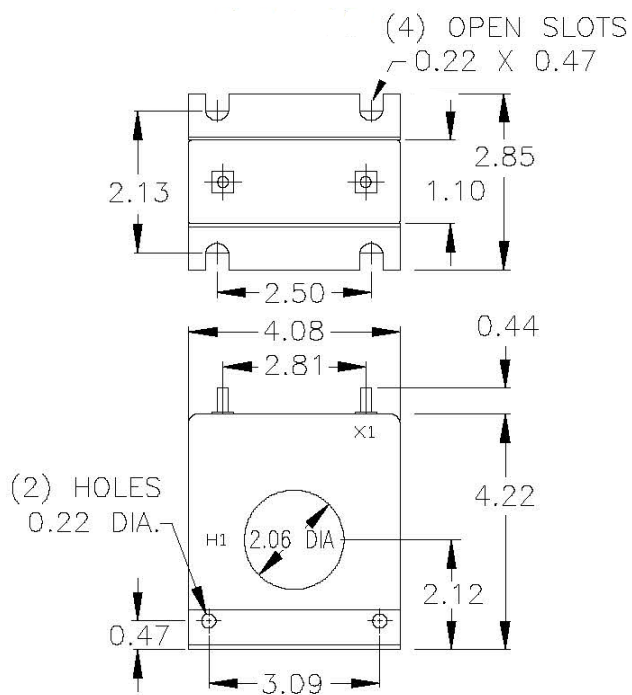

Model 6ASFT

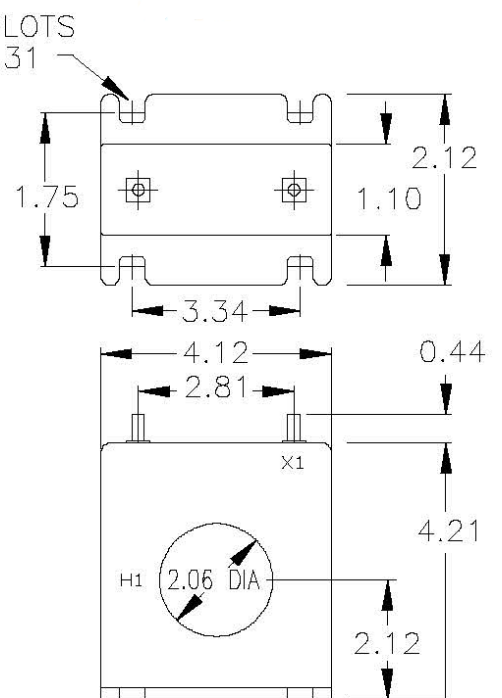

Model 6ARL

